





Elektro-Automatik

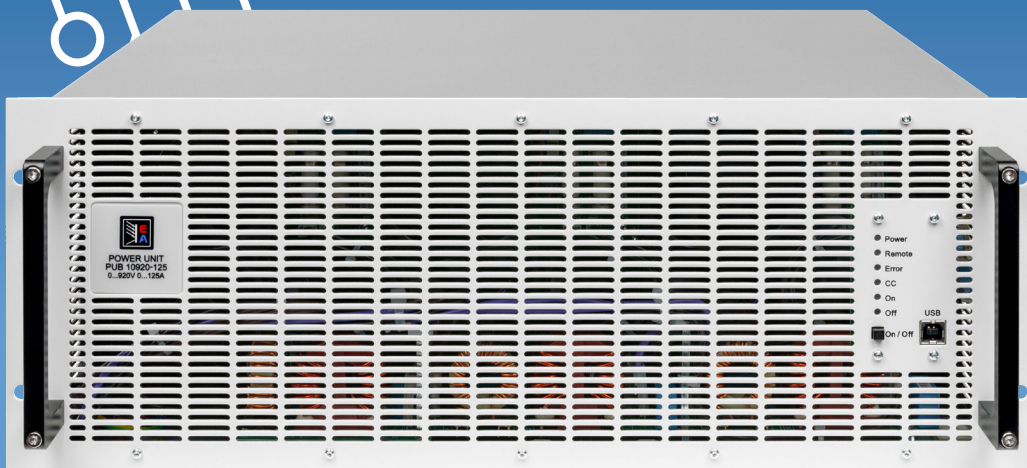

**DATASHEET**

# EA-PUB 10000 4U

Programmable Bidirectional  
DC Power Supply

# EA-PUB 10000 4U 30 KW

Programmable bidirectional  
DC power supply



## Features

- Wide range input: 208 V - 480 V,  $\pm 10\%$ , 3ph AC
- Active Power Factor Correction, typical 0.99
- Bidirectional power supply, 2-quadrants in source and sink
- In load operation, regenerative with energy recovery into the grid
- Very high efficiency of up to over 96%
- High performance with up to 30 kW per unit
- Voltages from 0 - 60 V up to 0 - 2000 V
- Currents from 0 - 40 A up to 0 - 1000 A
- Flexible power regulated DC output/input stages (autoranging)
- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 16bit ADCs and DACs, selection of control speed: Normal, Fast, Slow
- Galvanically isolated Share-Bus for parallel operation of all power classes in the 10000 series
- Master-Slave-Bus for parallel operation of up to 64 units of all power classes in the 10000 series
- Integrated function generator with predefined curves (optional)
- Predefined automotive test procedures for LV123, LV124 and LV148 (optional)
- Integrated Battery test mode, battery and fuel cell simulation (optional)
- Photovoltaics test mode, EN 50530, MPPT (optional)
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

## Built-in interfaces

- USB
- Ethernet
- Analog
- Master-Slave-Bus
- Share-Bus
- USB Front panel

## Optional interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

## Software

- EA-Power Control
- EA-Battery Simulator

## Options

- Water Cooling in stainless steel
- Integrated function generator

## Technical data

General specifications	
<b>AC input</b>	
Voltage, Phases	380 V - 480 V $\pm 10\%$ , 3ph AC (208 V - 240 V $\pm 10\%$ , 3ph AC with derating to 18 kW)
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	<10 mA
Phase current	$\leq 56$ A @ 400 V AC
Oversvoltage category	2
<b>DC output static</b>	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, constant AC input voltage and constant temperature)
Line regulation CV	$\leq 0.01\%$ FS (380 V - 480 V $\pm 10\%$ AC input voltage, constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CV	$\leq 30$ ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Compensation (remote sense)	$\leq 5\%$ $U_{\text{Nominal}}$
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, constant AC input voltage and constant temperature)
Line regulation CC	$\leq 0.01\%$ FS (380 V - 480 V $\pm 10\%$ AC input voltage, constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CC	$\leq 50$ ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, constant AC input voltage and constant temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS current (0 - 100% load, constant AC input voltage and constant temperature)
<b>Protective functions</b>	
OVP	Oversvoltage protection, adjustable 0 - 110% $U_{\text{Nominal}}$
OCP	Overcurrent protection, adjustable 0 - 110% $I_{\text{Nominal}}$
OPP	Overpower protection, adjustable 0 - 110% $P_{\text{Nominal}}$
OT	Overtemperature protection (DC output shuts down in case of insufficient cooling)
<b>DC output dynamic</b>	
Rise time 10 - 90% CV	$\leq 10$ ms
Fall time 90 - 10% CV	$\leq 10$ ms
Rise time 10 - 90% CC	$\leq 2$ ms
Fall time 90 - 10% CC	$\leq 2$ ms
<b>Insulation</b>	
AC input to DC output	3750 Vrms (1 minute, creepage distance >8 mm)
AC input to case (PE)	2500 Vrms
DC output to case (PE)	Depending on the model, see model tables
DC output to interfaces	1000 V DC (models up to 360 V output), 1500 V DC (models from 500 V output)
<b>Interfaces digital</b>	
Built-in, galvanically isolated	USB, Ethernet (100 MBit), USB front panel, all for communication
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet

<b>General specifications</b>	
<b>Interfaces analog</b>	
Built-in, galvanically isolated	15 pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, R, remote control on/off, DC output on/off, resistance mode on/off
Outputs	Monitor U and I, alarms, reference voltage, DC output status, CV/CC regulation mode
Accuracy U / I / P / R	0 - 10 V: ≤0.2%, 0 - 5 V: ≤0.4%
<b>Device configuration</b>	
Parallel operation	Up to 64 units of any power class in series 10000 start from 5 kW, with Master-Slave-Bus and Share-Bus
<b>Safety and EMC</b>	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class A CISPR 11, class A FCC 47 CFR part 15B, unintentional radiator, class A EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Safety protection class	1
Ingress Protection	IP20
<b>Environmental conditions</b>	
Operating temperature	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
<b>Mechanical construction</b>	
Cooling	Forced air flow from front to rear (temperature controlled fans), optional water cooling
Dimensions (W x H x D)	Enclosure: 19" x 4U x 668 mm (26.3 in)
Weight	50 kg (110 lb)
Weight with water cooling	56 kg (126 lb)

Technical specifications	PUB 10060-1000	PUB 10080-1000	PUB 10200-420	PUB 10360-240	PUB 10500-180
<b>DC output</b>					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple in CV (rms)	≤25 mV (BW 300 kHz)	≤25 mV (BW 300 kHz)	≤40 mV (BW 300 kHz)	≤55 mV (BW 300 kHz)	≤70 mV (BW 300 kHz)
Ripple in CV (pp)	≤320 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)	≤300 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)	≤350 mV (BW 20 MHz)
$U_{Min}$ for $I_{Max}$ (sink)	0.62 V	0.62 V	1.8 V	2.5 V	1.1 V
Current range	0 - 1000 A	0 - 1000 A	0 - 420 A	0 - 240 A	0 - 180 A
Power range	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W
Resistance range	0.003 Ω - 5 Ω	0.003 Ω - 5 Ω	0.0165 Ω - 25 Ω	0.05 Ω - 90 Ω	0.08 Ω - 170 Ω
Output capacitance	25380 μF	25380 μF	5400 μF	1800 μF	675 μF
Efficiency sink/source (up to)	95.1% *1	95.5% *1	95.3% *1	95.8% *1	96.5% *1
<b>Insulation</b>					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC
<b>Article numbers</b>					
Standard	01123001	01123002	01123003	01123004	01123005
Standard + Water Cooling	01543001	01543002	01543003	01543004	01543005

\*1 At 100% power and 100% output voltage

Technical specifications	PUB 10750-120	PUB 10920-125	PUB 11000-80	PUB 11500-60	PUB 12000-40
<b>DC output</b>					
Voltage range	0 - 750 V	0 - 920 V	0 - 1000 V	0 - 1500 V	0 - 2000 V
Ripple in CV (rms)	≤200 mV (BW 300 kHz)	≤250 mV (BW 300 kHz)	≤300 mV (BW 300 kHz)	≤400 mV (BW 300 kHz)	≤500 mV (BW 300 kHz)
Ripple in CV (pp)	≤800 mV (BW 20 MHz)	≤1200 mV (BW 20 MHz)	≤1600 mV (BW 20 MHz)	≤2400 mV (BW 20 MHz)	≤3000 mV (BW 20 MHz)
$U_{Min}$ for $I_{Max}$ (sink)	1.2 V	2 V	3.4 V	3.2 V	3.7 V
Current range	0 - 120 A	0 - 125 A	0 - 80 A	0 - 60 A	0 - 40 A
Power range	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W
Resistance range	0.2 Ω - 370 Ω	0.25 Ω - 550 Ω	0.4 Ω - 650 Ω	0.8 Ω - 1500 Ω	1.7 Ω - 2700 Ω
Output capacitance	450 μF	100 μF	200 μF	75 μF	50 μF
Efficiency sink/source (up to)	96.5% *1	96.5% *1	95.8% *1	96.5% *1	96.5% *1
<b>Insulation</b>					
Negative DC pole <-> PE	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC
<b>Article numbers</b>					
Standard	01123006	01123007	01123008	01123009	01123010
Standard + Water Cooling	01543006	01543007	01543008	01543009	01543010

\*1 At 100% power and 100% output voltage

## General


The bidirectional DC laboratory power supplies in the PUB 10000 series from EA Elektro-Automatik are two quadrant devices which can perform the function of a power supply (source) as well as that of an electronic load (sink). In sink mode the device is regenerative and feeds the energy back into the local grid with an efficiency of up to over 96%. The PUB 10000 series are three phase units which, together with the wide input range, allows use with practically all global mains voltages. The DC voltages and currents are determined by the application and the spectrum ranges from 0 - 60 V to 0 - 2000 V and from 0 - 40 A up to 0 - 1000 A in a single device. The DC supply operates as a flexible output stage with a constant power characteristic (autoranging) with a wide voltage and current range. To achieve higher power and current all units are equipped with a Master-Slave-Bus. This enables up to 64 parallel connected devices to be combined into one system which can provide up to 3840 kW and 64000 A. Such a system works as a single unit and can use different power classes start from 5kW, only the voltage class must remain constant. In this way a user can construct a 150 kW system from two 60 kW 6U and one 30 kW 4U device from the PUB 10000 range. Furthermore, typical laboratory functionality is provided. This includes an extensive function generator, alarm and warning management, various optional industrial interfaces, software solutions and many more functions.

## AC connection

The DC power supplies in the PUB 10000 series with 30 kW are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. It reaches with 3-phases from 208 - 240 V (with a derating to 18 kW) and 380 - 480 V. Hence the devices can be operated in the majority of global grids.

## Energy recovery

The energy consumed in load mode is fed back into the connected grid with an efficiency of up to over 96%. As the energy is not converted to heat as in other loads, the energy costs are reduced. In addition, the devices generate less heat requiring less cost intensive air conditioning. One device can already be sufficient for a while range of applications, reducing investment and installation costs.

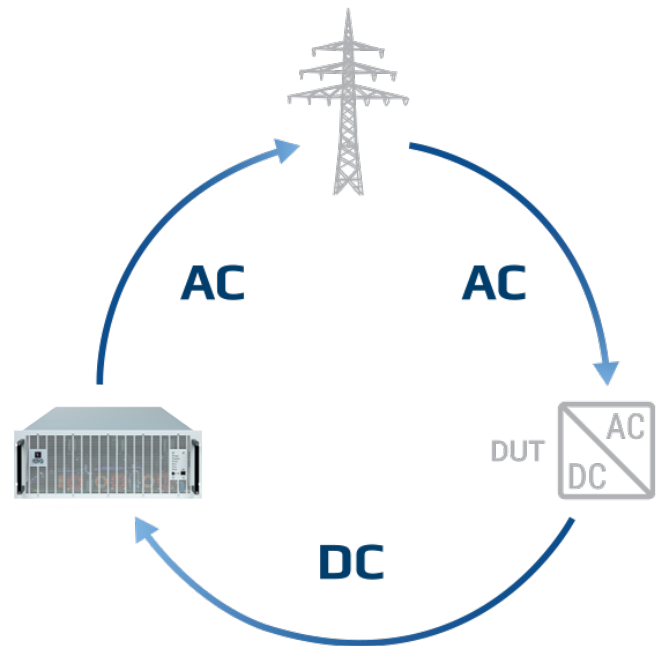

## The principle of energy recovery


The figure above demonstrates, based on a typical application, how a „device under test“ consumes energy from the mains, converts it to DC and feeds that into an EA device. The bidirectional power supply PUB 10000 converts this energy back into an AC current and feeds it back into the grid.

## DC output

The output of the bidirectional power supply PUB 10000 with 30 kW with a DC voltage of 0 - 60 V up to 0 - 2000 V allows positive and negative currents of 0 - 40 A up to 0 - 1000 A as a twoquadrant device. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

## DC connection

Connection of the DC output is via a copper rail on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

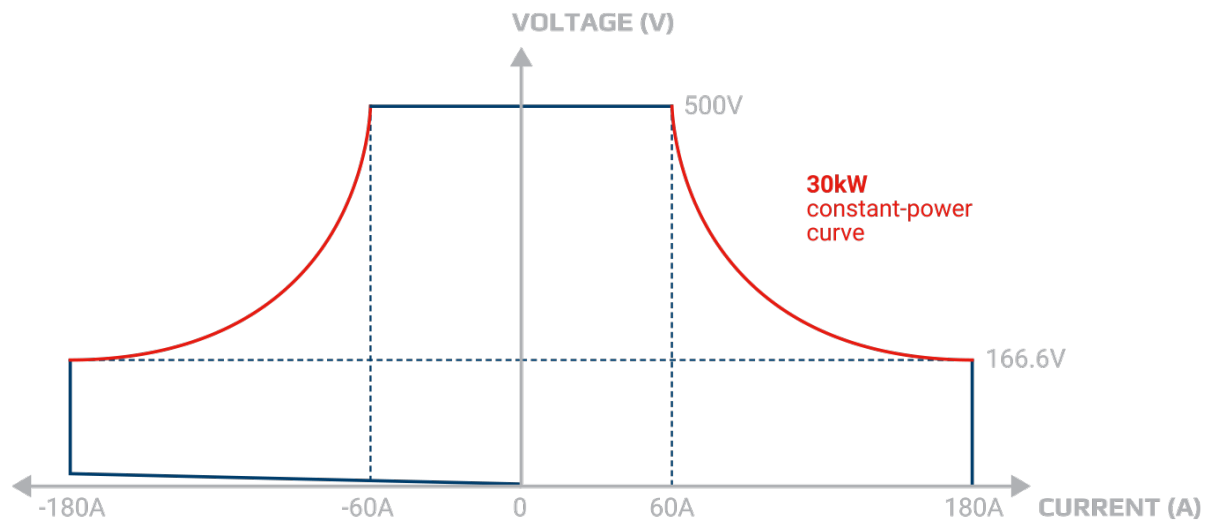

## The principle of autoranging

„Autoranging“ is a term when a bidirectional programmable DC power supply automatically offers a wide output and input range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

## Function generator (optional)

All models in the PUB 10000 series are equipped with a function generator. This allows waveforms such as sine, triangle, square or trapezoid to be simply called up and applied to either the voltage or the current. A ramp function and an arbitrary generator allow voltage and current progression to be freely programmable. Test sequences for repeated tests can be saved and reloaded when needed, which saves time. With a LUT allows IU reference lines to be stored. For simulation of a photovoltaics system or fuel cells, adaptable tables are provided. With the integrated and adjustable PV characteristics curve EN 50530 various solar modules can be defined and entire day trend progression can be simulated. Conclusion: the user is supported by a multitude of useful functions.

## Interfaces

As standard, 10000s series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC input. There is an analog interface which can be parameterized for input and output, control and monitoring, of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and Ethernet ports. Further optional industrial interface for plug & play slot complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

## High performance systems

High power applications can be covered with high power systems of up to 3840 kW. These are achieved by using the DC outputs of multiple PUB 10000 devices with vertical copper rails in parallel. Thus, a 19" cabinet with 42 U can provide a system with 300 kW occupying only 0.6 m<sup>2</sup> (6.5 sqft) of floor space. The Master-Slave-Bus allows for up to 13 cabinets with a maximum of 64 units with 60 kW each to behave as one unit.

## Master-Slave-Bus and Share-Bus

If the integrated Master-Slave-Bus and Share-Bus are used, a multi device system behaves as a single device. The Master-Slave-Bus and Share-Bus are simply connected between each device. With the Master-Slave-Bus the system data, such as total power and total current, are collected and shown on the master device. Warnings and alarms of the slave devices are shown clearly in the display. The Share-Bus equal load distribution to the individual devices.



## Example representation

In this illustration you can see a fully assembled and wired 240 kW system



## Applications

### Battery test for electro mobility

A typical application for the bidirectional power supplies from EA Elektro-Automatik is the testing of the electrical characteristics of a battery. The wide application spectrum covers cell, module or pack tests, the determination of the SOH (State-of-Health) for a second life classification as well as the End-of-Line (EOL) test. These applications put many demands on power electronics which are fulfilled by the PUB 10000 range. The excellent features of this device range are: measurement of voltage and current with the required accuracy and performance, reproducibility and reliability of these data and the flexible usability. Whether in an automated test system or in an integrated battery test, all possibilities are open to the user. Furthermore, the devices are clearly economical with efficiencies of up to over 96%.

### Battery simulation

Additional applications include the simulation of batteries as single cells, modules, or packs. These simulations aid in the optimal configuration of energy storage as well as the supplied components under test. Wherever reproducible data are needed a battery simulator is the first choice. Also, the use of a power source as simulator provides protection for the connected consuming component. The overcurrent protection (OCP) can, like a safety fuse, switch off the output and generate an alarm. The voltage can be monitored and can, if over or under limits, trigger various functions, and also generate warnings and alarms. Thus, many integrated functions can be safely performed.

### Fuel cell test

The devices in the PUB 10000 range may be used for testing the electrical features of fuel cells, fuel cell stacks and fuel cell systems. Here they generate highly accurate and reproducible results in all electrical modes. To test the resistance, performance, and active life of a fuel cell quickly and economically users can readily incorporate the devices into an automatic test system. The feedback capability guarantees high level of energy and cost efficiency. If higher currents are needed for testing a complete fuel cell system, then multiple devices can be connected in parallel in a master-slave system. High accuracy and performance are maintained here.

### On-board charger test

In an on-board charger (OBC) test the electrical features must be tested under various conditions. This requires a flexible test system which also provides test data. With the sequencing and logging functions of the software EA-Power Control it allows data to be exported and saved. In this way applications can instantly generate reproducible test results based on dynamic and highly accurate set point and measurement data. To avoid competition between two separate control loops of the device under test (DUT) and the testing device, the voltage regulation speed of the bidirectional power supply is adjustable. The modes Normal, Fast and Slow allow the PUB 10000 devices to be adapted the control characteristics of the on-board charger.

### Solar array simulation


The programmable power supplies of the PUB 10000 range are highly suited to use as test systems for PV inverters as they can provide the necessary simulation for solar panels. Users can quickly access simulation models according to EN 50530 or Sandia while it supports diverse solar panel types. Parameters such as irradiation (varying with shadows), panel technology and temperature can be included. Thus the devices can test all the relevant electrical features of a PV inverter including the important efficiency value. The high resolution of 16-bit technology and a high sampling rate enable the programmable power supply to deliver accurate results which can be documented and saved to an Excel file.

### Battery recycling

The bidirectional power supplies of the PSB 10000 range enable retired batteries from electric vehicles to be considered for a possible further use. Assessment of the battery pack starts with a State of Health (SOH) check to determine if a second life is feasible. This standard integral function can be initiated with one clic. If this check shows too little rest capacity, then the battery must be fully discharged before recycling. The autoranging of the devices guarantees the maximum possible total discharge though the high load current, even with voltages under 2 V. The mains feedback to the power grid up to 96% or more efficiency makes this process highly cost effective.




## Front panel description PUB 10000 4U

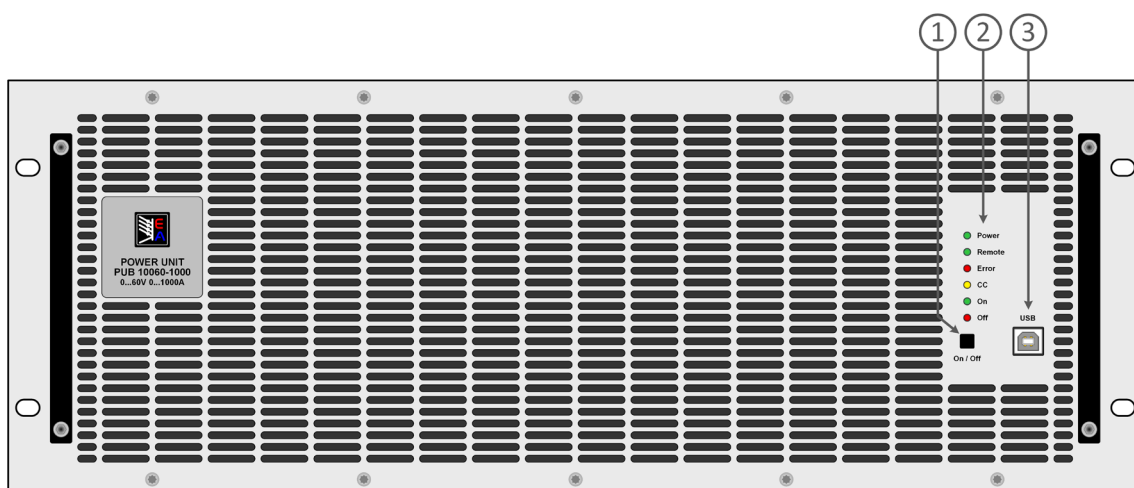




1. On / Off push-button
2. LED status display
3. USB Interface

## Rear panel description PUB 10000 4U $\leq 200$ V

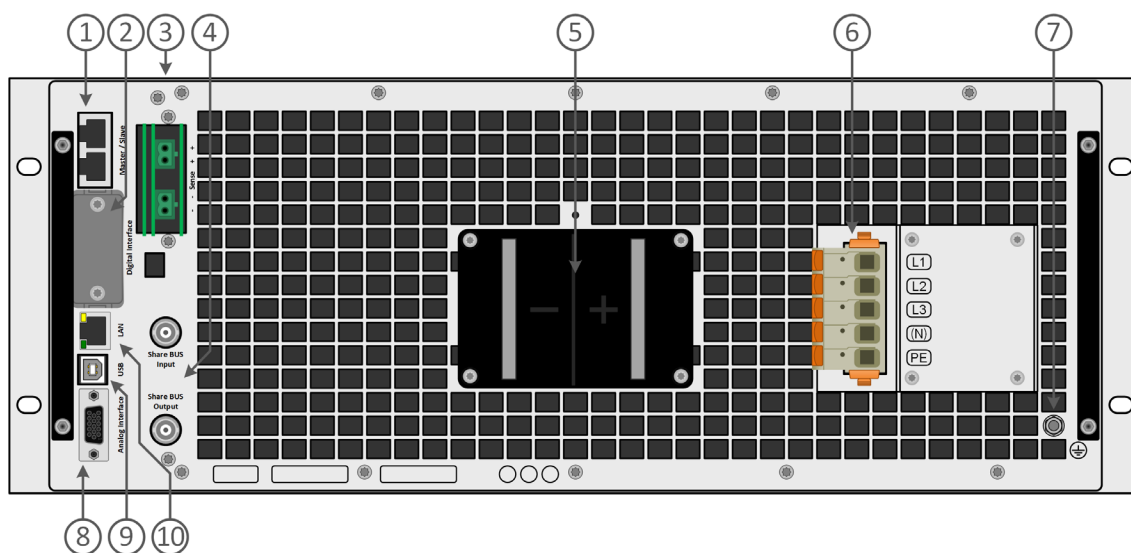


1. Master-Slave-Bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share-Bus connectors to set up a system for parallel connection
5. DC output connector (copper blades)
6. AC input connector
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface

# Technical drawings PUB 10000 4U $\geq 360$ V

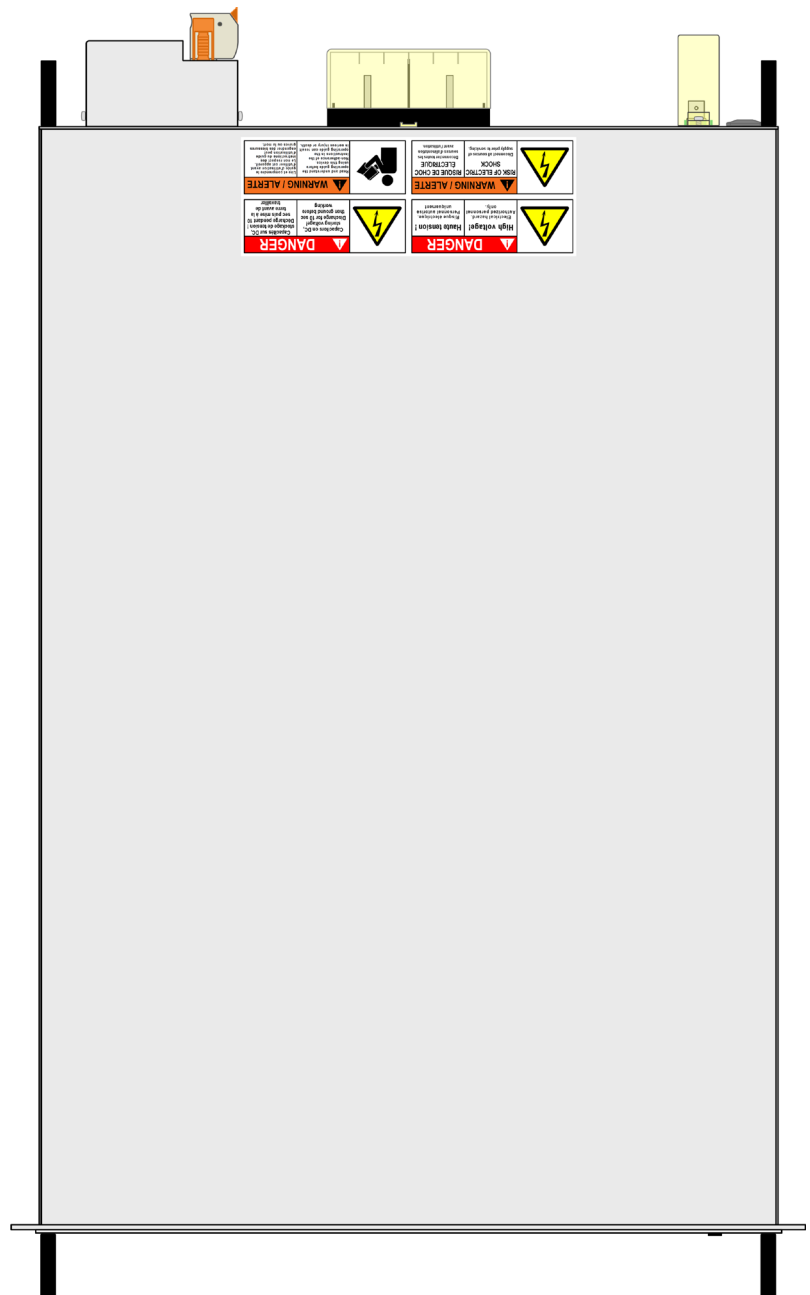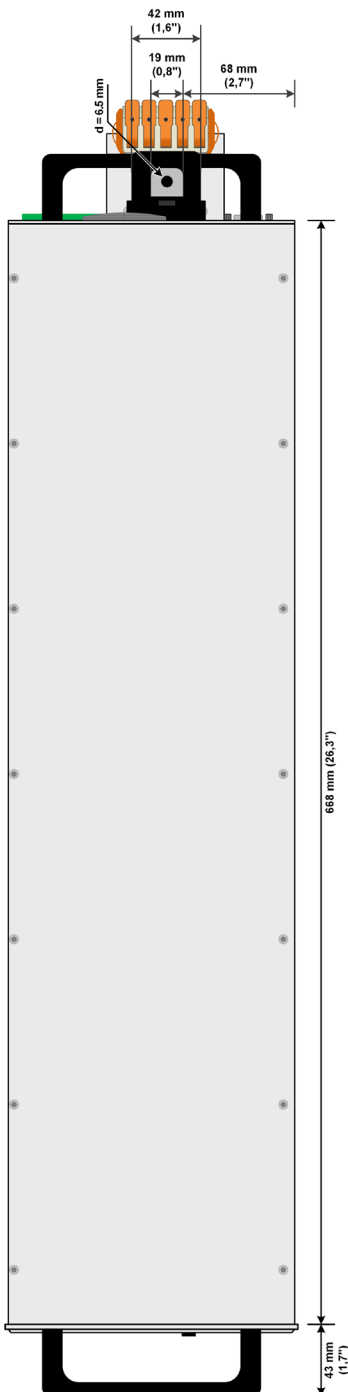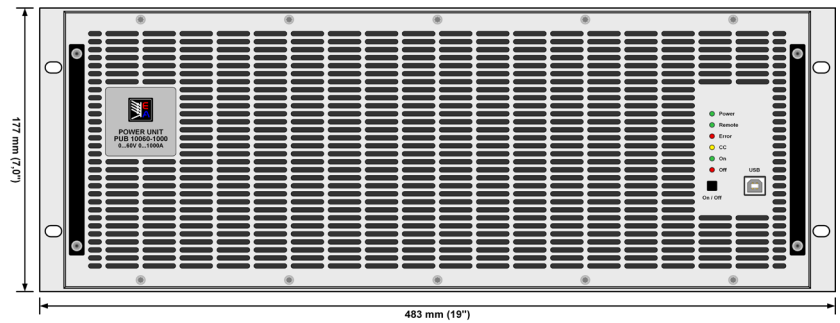


## Front panel description PUB 10000 4U

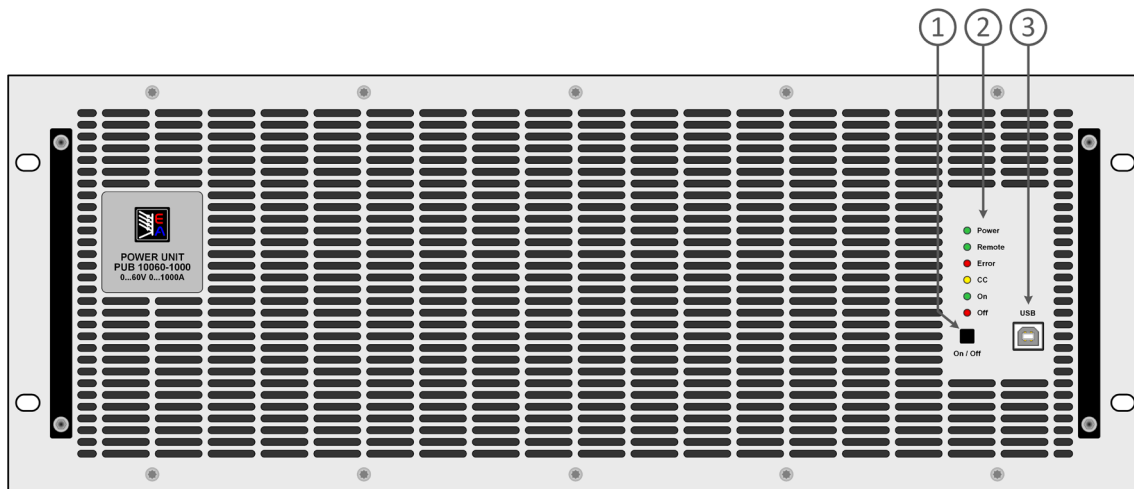


1. On / Off push-button
2. LED status display
3. USB Interface

## Rear panel description PUB 10000 4U $\geq 360$ V

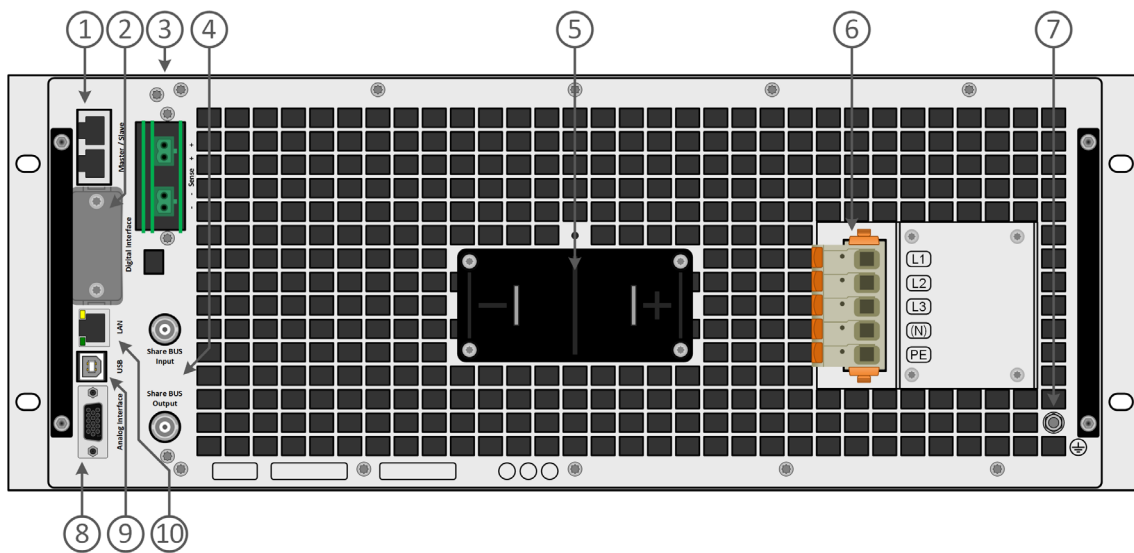


1. Master-Slave-Bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share-Bus connectors to set up a system for parallel connection
5. DC output connector (copper blades)
6. AC input connector
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface

## Front panel description PUB 10000 4U with Water Cooling option

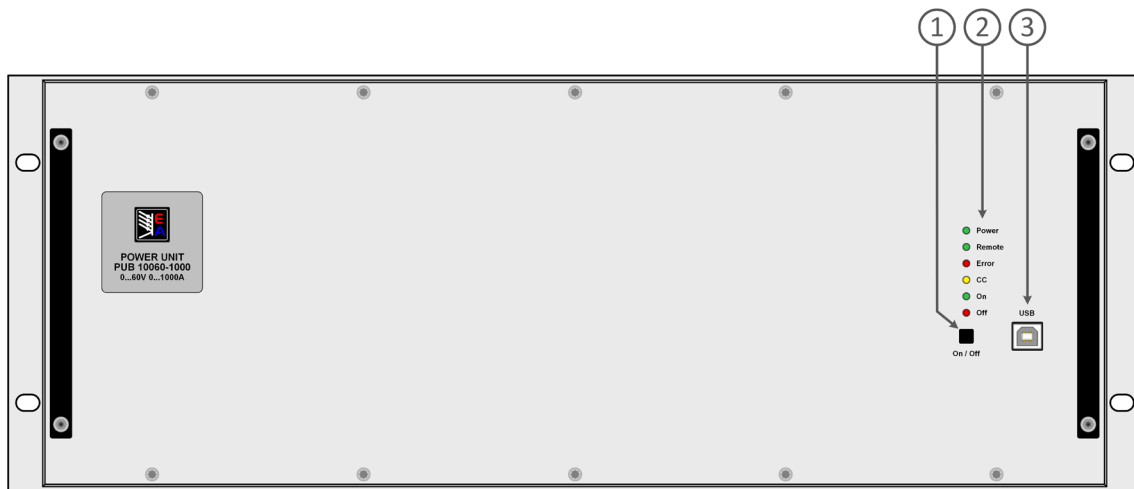

1. On / Off push-button
2. LED status display
3. USB Interface

## Rear panel description PUB 10000 4U with Water Cooling option

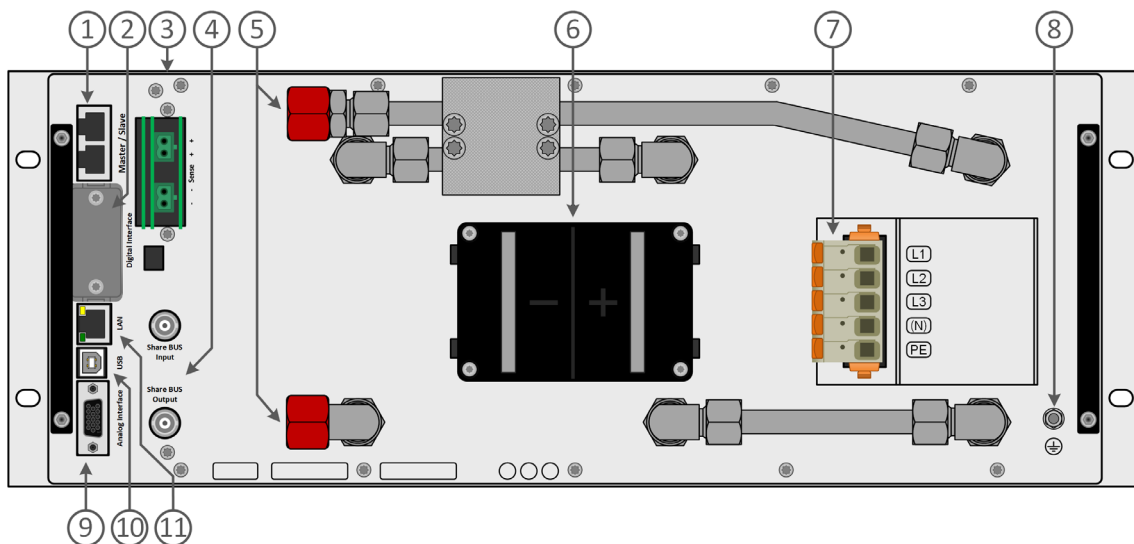

1. Master-Slave-Bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share-Bus connectors to set up a system for parallel connection
5. Inlets and outlets for water-cooling
6. DC output terminal (copper blades)
7. AC input connector
8. Grounding connection screw (PE)
9. Connector (DB15 female) for isolated analog programming, monitoring and other functions
10. USB interface
11. Ethernet interface

**EA Elektro-Automatik GmbH & Co. KG**

Helmholtzstr. 31-37  
41747 Viersen

Phone +49 2162 3785 - 0  
Fax +49 2162 1623 - 0  
ea1974@elektroautomatik.com

**[www.elektroautomatik.com](http://www.elektroautomatik.com)**

**EA Elektro-Automatik Inc.**

9845 Via Pasar  
San Diego, CA 92126 USA

Phone +1 (858) 836 1300  
sales@elektroautomatik.com

**[www.eapowered.com](http://www.eapowered.com)**

