


Data Proof -- Low Thermal Scanners Models and Options


160B

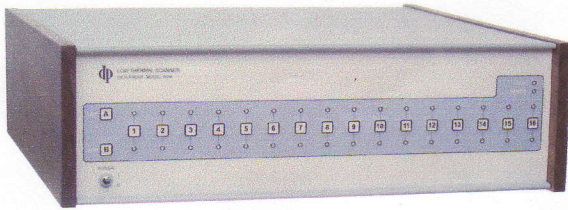

16 Channel, Low Thermal Scanner


Opt. 1 (160B Shown)

- 2 Terminals, 2 Lines
- 6 foot Solid Copper (untinned) Wire Groups of 4 pairs
- 4 Output Terminals

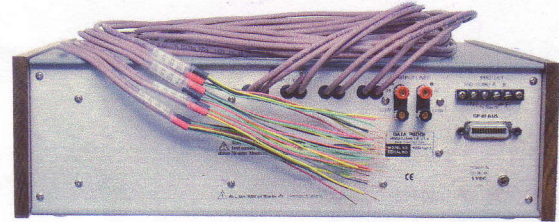


Opt. 2 (160B Shown)

- 2 Terminals x 16 Channels
- Gold over copper Low Thermal Binding Posts
- 4 Output Terminals

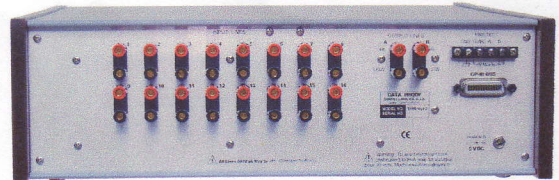


320B

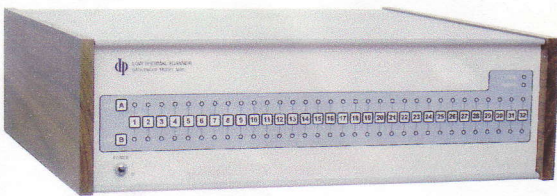

32 Channel, Low Thermal Scanner


Opt. 2 (320B Shown)

- 2 Terminals x 32 Channels
- Gold over copper Low Thermal Binding Posts
- 4 Output Terminals

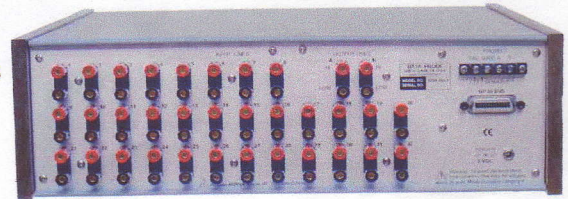


Opt. 2 (164B Shown)

- 4 Terminals x 16 Channels
- Gold over copper Low Thermal Binding Posts
- 8 Output Terminals

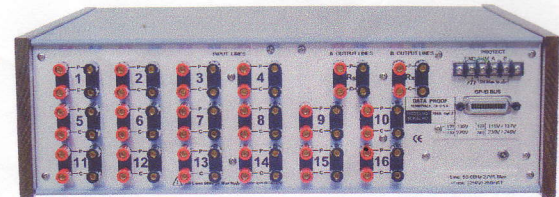

164B

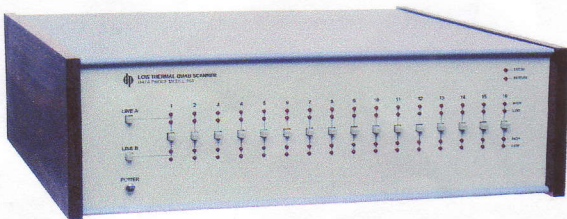

16 Channel, Quad Low Thermal Scanner

Opt. 3 (160B Shown)

- 4 Terminals + 2 Guard
- Shielded Teflon Cables 6 foot long.
- 8 Output wires + 2 Guard



Opt. 4 (160B Shown)

- 2 Terminals
- Shielded Teflon Cables
- 4 Output Terminals

